

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : RE41,442 E
APPLICATION NO. : 08/828330
DATED : July 20, 2010
INVENTOR(S) : Morgan et al.

Page 1 of 7

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Please delete RE41,442 in its entirety and insert RE41,442 as attached

Signed and Sealed this
Twentieth Day of September, 2011

A handwritten signature in black ink, reading "David J. Kappos". The signature is written in a cursive, flowing style with a large initial "D".

David J. Kappos
Director of the United States Patent and Trademark Office

(19) **United States**(12) **Reissued Patent****Morgan et al.**(10) **Patent Number:** **US RE41,442 E**(45) **Date of Reissued Patent:** **Jul. 20, 2010**(54) **INSULATED REMOVABLE POND COVER**(75) Inventors: **William Deyo Morgan**, Bloomington,
MN (US); **Michael Allan Morgan**,
Edina, MN (US)(73) Assignee: **Industrial & Environmental Concepts,**
Inc., Edina, MN (US)(21) Appl. No.: **08/828,330**(22) Filed: **Mar. 28, 1997**

3,374,918 A	*	3/1968	Creith	220/216
3,420,022 A	*	1/1969	Brock	52/302.1
3,462,040 A	*	8/1969	James	220/208
3,572,506 A	*	3/1971	Bandy et al.	210/86
3,683,428 A	*	8/1972	Morris	
3,862,876 A	*	1/1975	Graves	
3,933,628 A		1/1976	Varani	210/12
3,980,199 A		9/1976	Kays	220/227
3,991,900 A		11/1976	Burke et al.	220/219
4,038,447 A	*	7/1977	Brock	428/72
4,135,257 A	*	1/1979	Lof	
4,137,575 A	*	2/1979	Klaffke et al.	
4,139,117 A		2/1979	Dial	220/218
4,169,050 A	*	9/1979	Serfling et al.	

Related U.S. Patent Documents

Reissue of:

(64) Parent No.: **5,400,549**
 Issued: **Mar. 28, 1995**
 Appl. No.: **08/139,835**
 Filed: **Oct. 22, 1993**

(51) Int. Cl.
E04B 7/00 (2006.01)
B65D 88/34 (2006.01)
E04H 4/10 (2006.01)
C02F 1/00 (2006.01)

(52) U.S. Cl. **52/23; 52/5; 4/498; 160/231.1;**
220/216; 210/DIG. 9

(58) Field of Classification Search **52/3-5;**
52/309.9, 222, DIG. 13, 23, 408, 409, 745.06,
52/745.1, 748.1, 502.1, 63; 4/498, 503; 160/231.1;
403/291, 393; 210/DIG. 9; 220/216; 405/129.45,
405/129.9

See application file for complete search history.

(56) **References Cited****U.S. PATENT DOCUMENTS**

2,952,024 A	*	9/1960	Bartolucci	
3,004,769 A	*	10/1961	Turner	
3,104,775 A	*	9/1963	Champagnat	220/220
3,148,384 A	*	9/1964	Bartolucci et al.	
3,313,443 A		4/1967	Dial et al.	220/219
3,330,118 A		7/1967	Biais	405/53
3,355,745 A	*	12/1967	Jannuzzi	

(Continued)

FOREIGN PATENT DOCUMENTS

CA	1253266	4/1989
CA	2060479	8/1992
CA	2096852	8/1992
CA	2116354	2/1994
CA	2102590	5/1994
CA	2173831	4/1995
DE	2004656	* 8/1971
WO	WO 93/11330	* 6/1993

OTHER PUBLICATIONS

"Proposals for Pond Membrane," Nov. 8, 1984.


Parsons, "On-farm biogas production," Cooperative Extension, Northeast Regional Agricultural Engineering Service, 1984.

Primary Examiner—Robert J Canfield

(74) Attorney, Agent, or Firm—Fulbright & Jaworski L.L.P.

(57) **ABSTRACT**

An insulated removable pond cover for settling ponds. The pond cover comprises a plurality of sealed panel units containing insulation. The panels units are linked together by means of a system of cables which pass through grommets in the panel units.

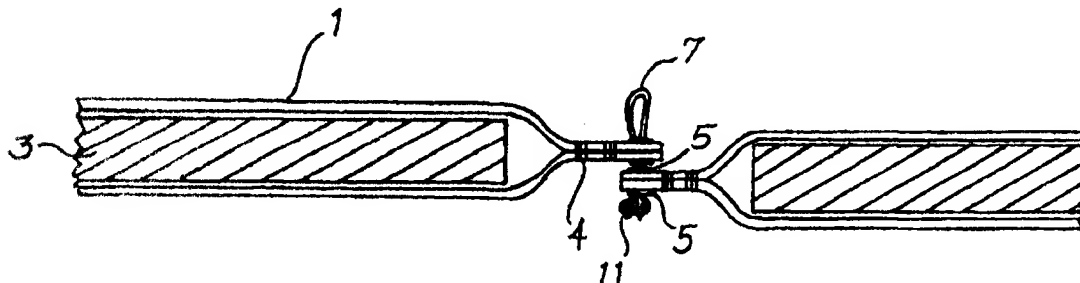36 Claims, 2 Drawing Sheets

US RE41,442 E

Page 2

U.S. PATENT DOCUMENTS

4,192,025 A *	3/1980	Hinsperger		5,067,182 A *	11/1991	Koelsch	
4,197,595 A *	4/1980	Dearing		5,074,427 A *	12/1991	Siemerink et al.	220/218
4,244,819 A	1/1981	Ballu	210/242.3	5,197,239 A *	3/1993	Glynn et al.	
4,294,589 A	10/1981	Zachary	55/36	5,265,976 A	11/1993	Russell	405/52
4,438,863 A *	3/1984	Wilson et al.	220/227	5,505,848 A	4/1996	Landine et al.	210/170
4,503,988 A	3/1985	Gerber	220/219	5,546,615 A *	8/1996	Chamness	
4,590,714 A *	5/1986	Walker		5,562,759 A *	10/1996	Morgan et al.	
4,603,790 A	8/1986	Gerber	220/219	5,587,080 A	12/1996	Landine et al.	210/603
4,620,396 A *	11/1986	Bjornstwedt		5,652,972 A *	8/1997	Chartrand	4/506
4,672,691 A	6/1987	De Garie et al.	4/499	5,861,095 A *	1/1999	Vogel et al.	210/605
4,678,375 A	7/1987	Gagle et al.	405/270	6,047,415 A *	4/2000	Brown	4/498
4,749,606 A *	6/1988	Moore	428/166	6,136,194 A *	10/2000	Vogel et al.	210/605
4,780,351 A *	10/1988	Czempoyesh	428/122	6,505,445 B2 *	1/2003	Johnson et al.	52/223.3
4,916,937 A	4/1990	Robertson et al.	405/270	6,508,247 B1 *	1/2003	Karales	126/564
5,022,101 A *	6/1991	Gosselin et al.		2003/0066789 A1 *	4/2003	Morgan et al.	210/120
5,050,341 A *	9/1991	Breezer et al.	47/59 R	2003/0070365 A1 *	4/2003	Martin	52/3

* cited by examiner

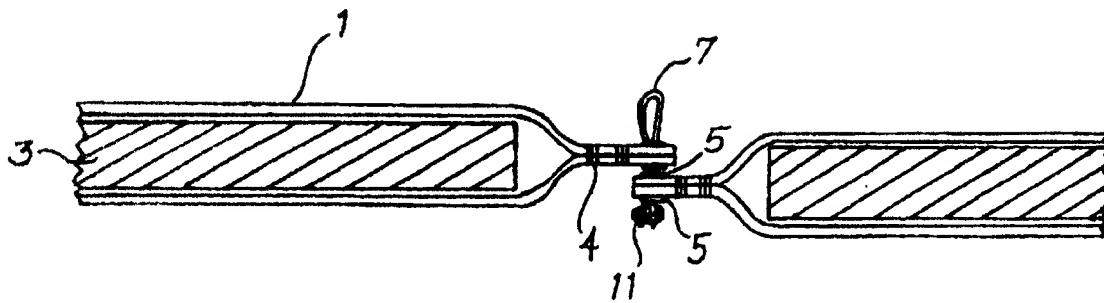


FIG. 1.

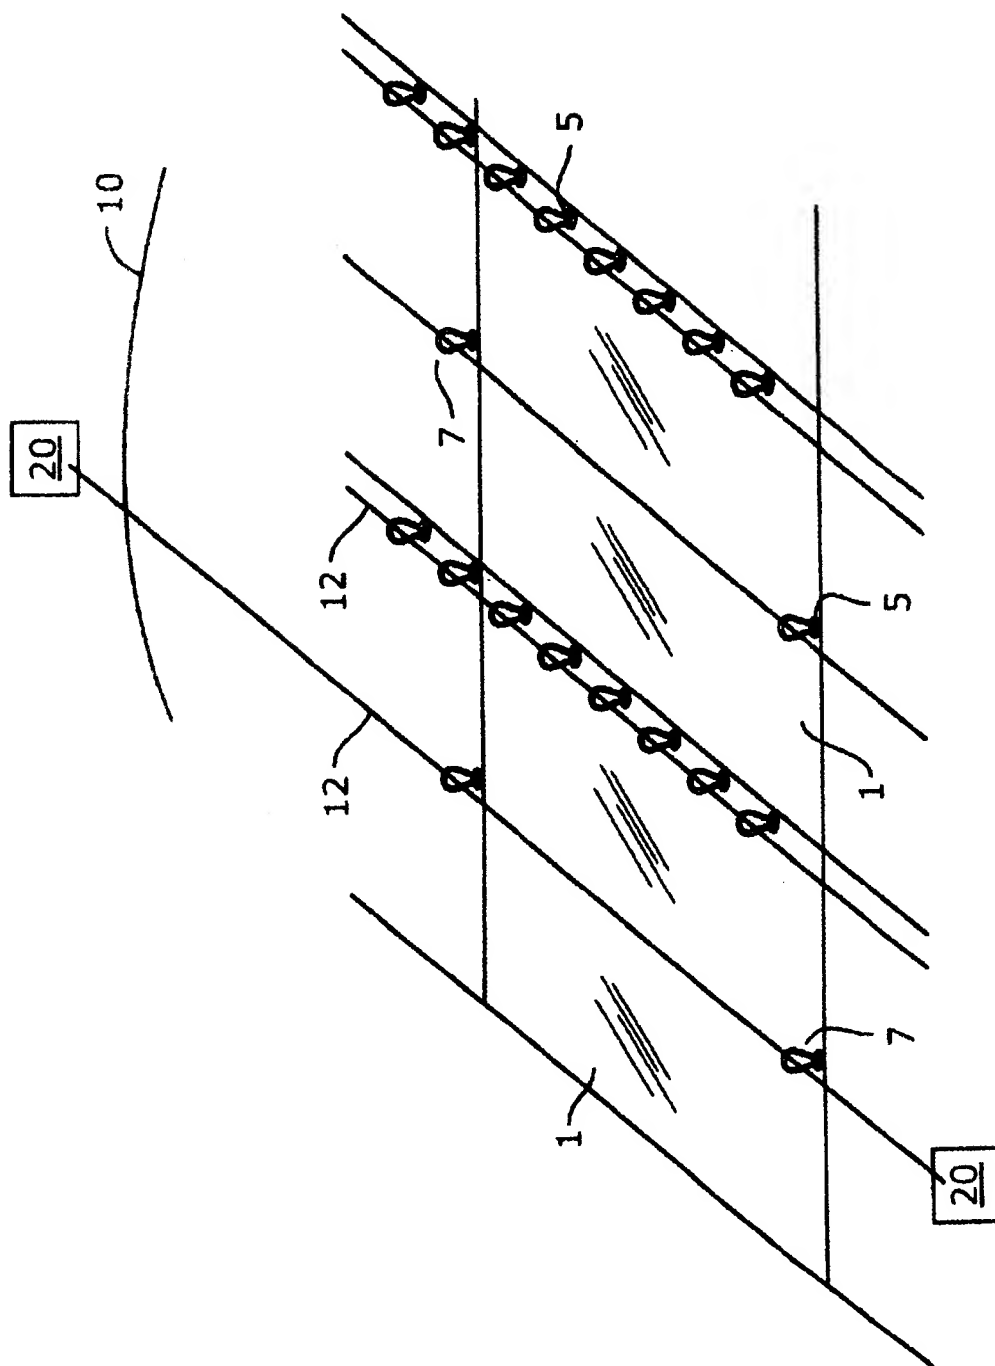


FIG. 2
AMENDED

US RE41,442 E

1

INSULATED REMOVABLE POND COVER

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue.

SUMMARY AND BACKGROUND OF THE INVENTION

Man-made, usually rectangular, settling ponds are used for holding sewage and industrial wastes, *which are examples of wastewater*. These ponds are usually covered by a large one-piece geomembrane which has gas and water collection systems and is usually not insulated. These pond covers are laid on-site and secured by an anchoring trench. Because of their size, they are difficult to remove.

The present invention is an insulated removable pond cover which is made in sections which are held together by means of a series of grommets and cables. The cables are secured to a series of concrete deadheads.

The primary advantage of the invention is that it is removable, thus allowing the pond to be dredged and re-used. Another advantage is that the insulation results in heat being retained in the pond, thus speeding biodegradation of organic material.

DESCRIPTION OF THE DRAWINGS

FIG. 1 is a side view of two of the panels.

FIG. 2 is a top perspective view showing two full panels and parts of four other panels, starting from one edge of the pond cover on the left.

DESCRIPTION OF THE INVENTION

The pond cover comprises a plurality of generally rectangular casings or panel units **1** linked together. The number and size of the casings **1** will vary depending upon the size of the pond **10** to be covered, and the casings **1** are arranged in as many rows as are needed. Generally each casing **1** will be about seven and one-half feet wide and approximately forty feet long. Each casing **1** is filled with a layer of insulation **3** and then sealed at either end and along either side by a fusion weld **4**. The casings **1** are made of a geomembrane (a high density polyethylene material).

Adjacent casings **1** are linked together in overlapping spaced relationship by means of a grommet and cable system. Each casing **1** is provided with a plurality of grommets **5** at either end and along either side, positioned outside of the welded area **4** so as to not break the seal. The total number of grommets **5** per casing **1** can vary. After the grommets **5** of adjacent casings **1** are lined up in vertical spaced relationship to each other, a cable **7** is passed through the openings of the grommets **5**, is formed into a loop above the panels **1** and is secured in position by a cable clamp **11** attached to the cable **7** beneath the casings **1**. A heavy tie-down cable **12** is then passed through all the loops of the cables **7** in the row and is secured at either end to an anchor post **20** such as a concrete deadhead, in a conventional manner such as tying the cable **12** to a rod with a nut at either end and securing the cable **12** with a cable clamp. If wind getting underneath the cover is a problem, additional cables can be passed through the cable loops **7** perpendicular to cable **12** at either end and in the middle of the series of casings **1**.

Once the pond cover has been secured in position, it will float upon the liquid in the pond, and it can be removed when the pond needs to be dredged.

2

We claim:

1. A pond cover comprising a plurality of panel units linked together; means for insulating said pond cover, said insulating means comprising a generally rectangular layer of insulation wherein each of said panel units is filled internally with said layer of insulation and is sealed at either end and along either side by welding; and

means for linking said panel units together and securing said pond cover in position on a pond, said linking means comprising grommets disposed along said sealed end of each of said panel units, and each of said panel units is linked in vertical spaced relationship to an adjacent panel unit by at least one cable disposed through said vertical spaced grommets and formed into a loop projecting above said panel units, and said securing means including a second cable which is disposed through [the] an entire row of said loops and is anchored at either of its end to an anchoring means.

2. The pond cover of claim 1, where the loops disposed through the grommets project both above and below the panel units.

3. The pond cover of claim 1, where the loops disposed above the second cable are disposed through said grommets.

4. A pond cover comprising:

a plurality of panel units linked together;

means for insulating the pond cover, the insulating means comprising a generally rectangular layer of insulation where each of the panel units is filled internally with the layer of insulation and is sealed at either end and along either side by welding; and

means for linking the panel units together and securing the pond cover in position on a pond, the linking means comprising grommets disposed along the sealed end of each of the panel units, and each of the panel units is linked in vertical spaced relationship to an adjacent panel unit by at least one cable disposed through the vertical spaced grommets and formed into a loop projecting above the panel units, and the securing means including a second cable which is disposed through a row of the loops and is anchored at either of its end to an anchoring means.

5. A cover and wastewater combination comprising:

wastewater that includes sewage and/or industrial waste; at least two sealed panels positioned over the wastewater, each panel having a side characterized by an edge and a plurality of openings spaced apart from the edge; and the openings in one of the panels being positioned above the openings in the other panel, and a fastener being disposed through at least two adjacent openings.

6. The cover and wastewater combination of claim 5, where the panels are rectangular.

7. The cover and wastewater combination of claim 5, where the panels comprise a geomembrane.

8. The cover and wastewater combination of claim 5, where the panels are approximately seven and one-half feet wide and approximately forty feet long.

9. The cover and wastewater combination of claim 5, where each panel includes insulation material sealed inside, but not completely filling, a void in the panel.

10. The cover and wastewater combination of claim 9, where the insulation material is sealed inside each panel by a weld.

11. The cover and wastewater combination of claim 9, where the insulation material is rectangular.

12. The cover and wastewater combination of claim 5, where the panels further comprises a grommet circumscribing each opening.

US RE41,442 E

3

13. A cover and wastewater combination comprising:
wastewater that includes sewage and/or industrial waste;
and
at least two sealed panels removably linked to each other,
the panels being positioned over and in direct contact
with the wastewater;
where each panel contains, but is not completely filled
with, an insulation material.
14. The cover and wastewater combination of claim 13,
where each panel comprises a geomembrane.
15. The cover and wastewater combination of claim 13,
where the insulation material is sealed inside each panel by
a weld.
16. The cover and wastewater combination of claim 13,
where each panel includes multiple openings, the panels
overlap, and the panels are removably linked to each other
with fasteners.
17. A cover and wastewater combination comprising:
wastewater that includes sewage and/or industrial waste;
at least two sealed panels removably linked together in
overlapping relationship over the wastewater; and
means for removably linking the panels in overlapping
relationship, the means comprising fasteners and open-
ings defined in each of the panels;
where the openings in one of the panels are positioned
above the openings in another of the panels to form
pairs of openings of different panels, and one of the
fasteners is disposed through each pair of overlapping
openings so as to removably link the overlapping pan-
els.
18. A cover comprising:
a plurality of panels removably linked together, each
panel comprising high density polyethylene material;
and
insulation material sealed inside each panel;
where the insulation material inside each panel does not
completely fill the panel.
19. The cover of claim 18, where each panel includes
multiple openings, the panels overlap, and the panels are
removably linked together with fasteners.
20. A cover comprising:
a plurality of panels configured for use over wastewater,
the panels being removably linked together with fasten-
ers disposed through overlapping openings of adjacent
panel portions;
where each panel includes insulation material sealed
inside, but not completely filling, a void in the panel.

4

21. The cover of claim 20, where each panel comprises
geomembrane.
22. The cover of claim 21, where each panel includes
multiple openings, the panels overlap, and the panels are
removably linked together with fasteners.
23. A method of manipulating a cover comprising:
linking at least two panels such that the panels are adja-
cent to each other, where each panel includes insulation
material that is sealed inside, but that does not com-
pletely fill, a void in the panel; and
disposing the panels over wastewater that includes sew-
age and/or industrial waste.
24. The method of claim 23, where each panel comprises
geomembrane.
25. The method of claim 23, where the insulation material
is rectangular.
26. The method of claim 23, where each panel comprises
openings, and the linking includes placing a fastener
through at least one pair of adjacent openings.
27. The method of claim 26, where the openings in each
panel are adjacent to at least one edge of one side of the
panel.
28. The method of claim 26, where the linking includes
orienting the panels in an overlapping relationship.
29. The method of claim 28, further comprising:
anchoring the linked panels over the wastewater.
30. A method of covering wastewater, comprising:
disposing at least two panels over wastewater that
includes sewage and/or industrial waste, where the at
least two panels are linked to each other and each
contains, but is not completely filled with, insulation
material sealed inside it.
31. The method of claim 30, where each panel comprises
geomembrane.
32. The method of claim 30, where the insulation material
is rectangular.
33. The method of claim 30, where each panel comprises
openings, and the linking includes placing a fastener
through at least one pair of adjacent openings.
34. The method of claim 33, where the openings in each
panel are adjacent to at least one edge of one side of the
panel.
35. The method of claim 33, where the linking includes
orienting the panels in an overlapping relationship.
36. The method of claim 35, further comprising:
anchoring the linked panels over the wastewater.

* * * * *